

# FOAM HOSE REEL

## NON STANDARD HOSE REEL

### FOAM HOSE REEL

#### NON STANDARD HOSE REEL


- Designed for use in petrol stations
- Same high quality construction as other BFI hose reels
- Supplied with a brass foam indicator

The foam hose reel comes complete with a foam inductor which is used to supply a mixture of foam concentrate and water. Foam solution is one of the most effective methods of extinguishing fires involving flammable liquids such as petrol and solvents.

Foam hose reels are commonly used in petrol stations and fuel storage as well as oil and solvent storage and work areas.



	FOS088-MS-STD-RD
Hose Length & Diameter	25mm x 30m
Foam Tank Capacity	50L
<b>Test Pressure @ 6 bar</b>	<b>Jet lever Nozzle (Orifice 012mm)</b>
Flow Rate	65.5L per minute
Suction Rate	4.5L per minute
Induction Rate	6.87%
<b>Pressure @ 5 bar</b>	<b>Jet lever nozzle (Orifice 012mm) Brass</b>
Flow Rate	61.5L per minute
Suction Rate	3.5L per minute
Induction Rate	5.691%

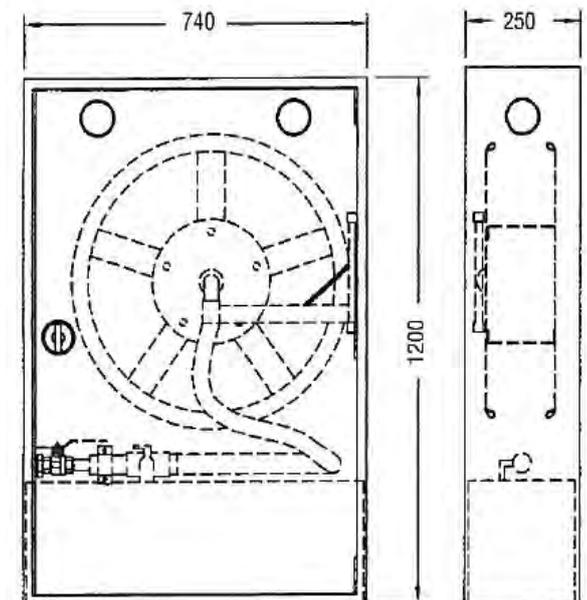

Standard assembly includes brass inductor, fibreglass foam tank and mild steel reel. Other materials of construction are available on request.